


EMT6165GK



ENGINEERING CODE
912GA27

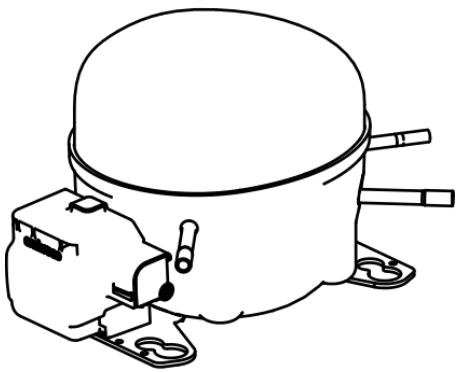

REFRIGERANT
R-404A



POWER SUPPLY
220-240 V 50 Hz



APPLICATION
MBP



MOTOR TYPE
CSIR



STANDARD
EN12900



COOLING CAPACITY
465 W



EFFICIENCY
1.68 W/W

DATA

GENERAL DATA

Model	EMT6165GK
Type	Hermetic Reciprocating
Technology	ON/OFF
Compressor Application	MBP
Expansion Device	Capillary Tube or Expansion Valve
Compressor Cooling	Fan/220
HP	1/3
Starting Torque	HST
Plant	ITALY

ELECTRICAL DATA

Start Winding Resistance	null
Run Winding Resistance	null
Locked Rotor Amperage (LRA) 50Hz	10.4 A

MECHANICAL DATA

Displacement	5.19 cm³
Oil Charge	180 ml
Oil Type	ESTER
Oil Viscosity	ISO22
Weight	7.8 Kg

ELECTRICAL COMPONENTS

Start Capacitor	53-64 µf/330 V
CSR CSIR BOX	No
Starting Device Type	RELAY
Starting Device Description	MTRP-38*
Overload Protection	T0571/G6

PERFORMANCE

TESTED CONDITIONS

Tested Refrigerant	R-404A
Tested Application	MBP
Tested Standard	EN12900
Tested Cooling	Fan
Tested Voltage	220 V
Max Refrigerant Charge	250 g
Refrigerant Temperature	Dew

RATED POINTS

Condensing Temperature °C	Evaporating Temperature °C	Cooling Capacity W	Efficiency W/W	Power Consumption W	Current A	Gas Flow Rate kg/h
45	-10	465	1.68	276	-	13.95


Test Condition: Subcooling 0 K, Return Gas 20 °C. Data are an indication of performance based simulation.

PERFORMANCE CURVE				Condensing Temperature 35°C	
Evaporating Temperature °C	Cooling Capacity W	Efficiency W/W	Power Consumption W	Current A	Gas Flow Rate kg/h
-20	372	1.73	215	-	9.64
-15	459	1.98	232	-	12.02
-10	561	2.23	252	-	14.80
-5	679	2.51	271	-	18.08
0	814	2.83	288	-	21.94
5	966	3.22	300	-	26.46
10	1138	3.72	306	-	31.75
Test Condition: Subcooling 0 K, Return Gas 20 °C. Data are an indication of performance based simulation.					

PERFORMANCE CURVE				Condensing Temperature 45°C	
Evaporating Temperature °C	Cooling Capacity W	Efficiency W/W	Power Consumption W	Current A	Gas Flow Rate kg/h
-20	303	1.29	236	-	8.92
-15	378	1.49	253	-	11.24
-10	465	1.68	276	-	13.95
-5	565	1.87	301	-	17.16
0	679	2.08	327	-	20.95
5	809	2.30	351	-	25.40
10	956	2.57	371	-	30.62
Test Condition: Subcooling 0 K, Return Gas 20 °C. Data are an indication of performance based simulation.					

PERFORMANCE CURVE				Condensing Temperature 55°C	
Evaporating Temperature °C	Cooling Capacity W	Efficiency W/W	Power Consumption W	Current A	Gas Flow Rate kg/h
-10	366	1.28	286	-	12.97
-5	448	1.42	315	-	16.09
0	541	1.56	346	-	19.79
5	647	1.71	379	-	24.16
10	766	1.87	410	-	29.28
Test Condition: Subcooling 0 K, Return Gas 20 °C. Data are an indication of performance based simulation.					

ENVELOPE

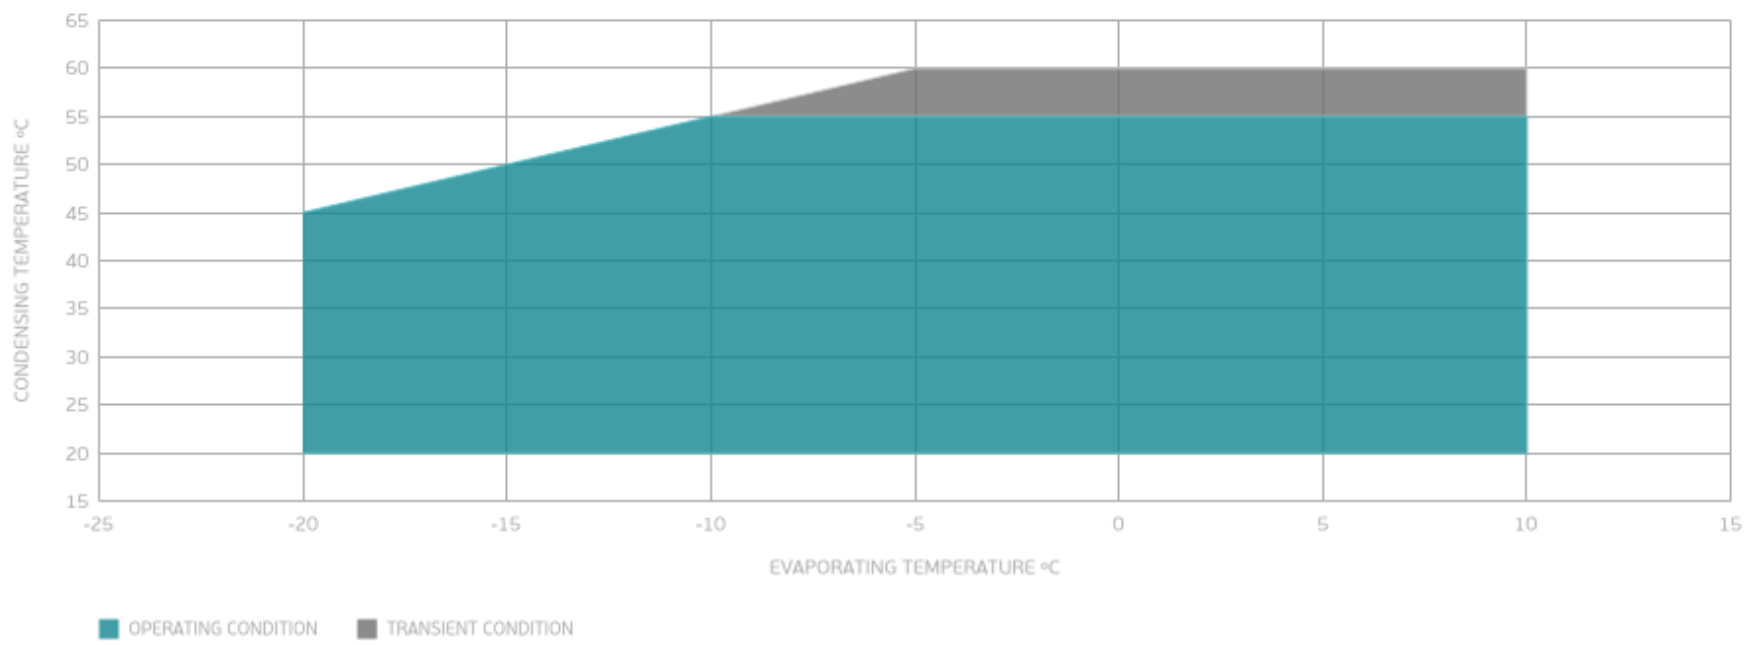

External


EXTERNAL CHARACTERISTICS

Base Plate	SMALL
Tray Holder	YES


Connector	Internal Diameter	Shape	Material
Suction	6.1 mm	SLANTED 42°	COPPER
Discharge	4.94 mm	STRAIGHT	COPPER
Process	6.1 mm	SLANTED 42°	COPPER

EXTERNAL DIMENSIONS

SHELL

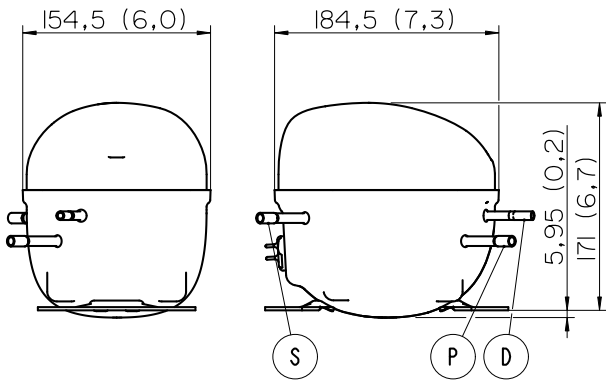

BASE

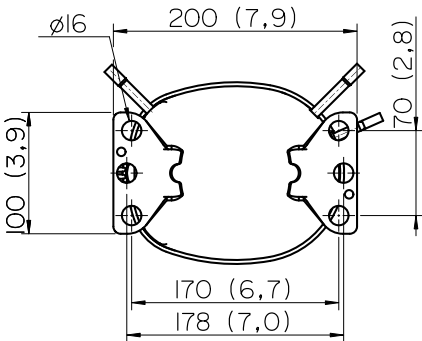

FENCE

