


NE2121Z



ENGINEERING CODE
262BA50



REFRIGERANT
R-134a



POWER SUPPLY
220-240 V 50 Hz



APPLICATION
LBP



MOTOR TYPE
CSIR



STANDARD
ASHRAE



COOLING CAPACITY
251 W



EFFICIENCY
1.25 W/W



DATA

GENERAL DATA

Model	NE2121Z
Type	Hermetic Reciprocating
Technology	ON/OFF
Compressor Application	LBP
Expansion Device	Capillary Tube or Expansion Valve
Compressor Cooling	Fan/220
HP	1/4
Starting Torque	HST
Plant	SLOVAKIA

ELECTRICAL DATA

Start Winding Resistance	21.1 Ω at 25°C
Run Winding Resistance	7.7 Ω at 25°C

MECHANICAL DATA

Displacement	9.26 cm ³
Oil Charge	350 ml
Oil Type	ESTER
Oil Viscosity	ISO22
Weight	10.9 Kg

ELECTRICAL COMPONENTS

Start Capacitor	72-88 µf/330 V
CSR CSIR BOX	No
Starting Device Type	RELAY
Starting Device Description	MTRP-0027*
Overload Protection	T0057/G5

PERFORMANCE

TESTED CONDITIONS

Tested Refrigerant	R-134a
Tested Application	LBP
Tested Standard	ASHRAE
Tested Cooling	Fan
Tested Voltage	220 V
Refrigerant Temperature	Dew

RATED POINTS

Condensing Temperature °C	Evaporating Temperature °C	Cooling Capacity W	Efficiency W/W	Power Consumption W	Current A	Gas Flow Rate kg/h
54.4	-23.3	251	1.25	200	1.67	4.87

Test Condition: Liquid 32.2 °C, Return Gas 32.2 °C. Data generated in accordance to EN 12900:2013 polynomial equation and tolerance guidelines.

PERFORMANCE CURVE

Condensing Temperature 35°C

Evaporating Temperature °C	Cooling Capacity W	Efficiency W/W	Power Consumption W	Current A	Gas Flow Rate kg/h
-30	198	1.20	165	1.56	3.82
-25	261	1.41	185	1.63	5.07
-20	339	1.63	208	1.70	6.58
-15	431	1.86	232	1.77	8.41
-10	541	2.13	254	1.85	10.57
-5	668	2.45	273	1.93	13.12

Test Condition: Liquid 32.2 °C, Return Gas 32.2 °C. Data generated in accordance to EN 12900:2013 polynomial equation and tolerance guidelines.

PERFORMANCE CURVE

Condensing Temperature 45°C

Evaporating Temperature °C	Cooling Capacity W	Efficiency W/W	Power Consumption W	Current A	Gas Flow Rate kg/h
-30	183	1.08	170	1.58	3.53
-25	245	1.28	191	1.64	4.75
-20	321	1.47	218	1.71	6.23
-15	412	1.67	247	1.79	8.03
-10	520	1.88	277	1.89	10.18
-5	647	2.12	306	2.00	12.70

Test Condition: Liquid 32.2 °C, Return Gas 32.2 °C. Data generated in accordance to EN 12900:2013 polynomial equation and tolerance guidelines.


PERFORMANCE CURVE

Condensing Temperature 55°C

Evaporating Temperature °C	Cooling Capacity W	Efficiency W/W	Power Consumption W	Current A	Gas Flow Rate kg/h
-25	226	1.18	191	1.65	4.38
-20	300	1.37	219	1.72	5.83
-15	390	1.55	252	1.81	7.59
-10	496	1.73	287	1.93	9.70
-5	621	1.92	324	2.07	12.20

Test Condition: Liquid 32.2 °C, Return Gas 32.2 °C. Data generated in accordance to EN 12900:2013 polynomial equation and tolerance guidelines.

ENVELOPE

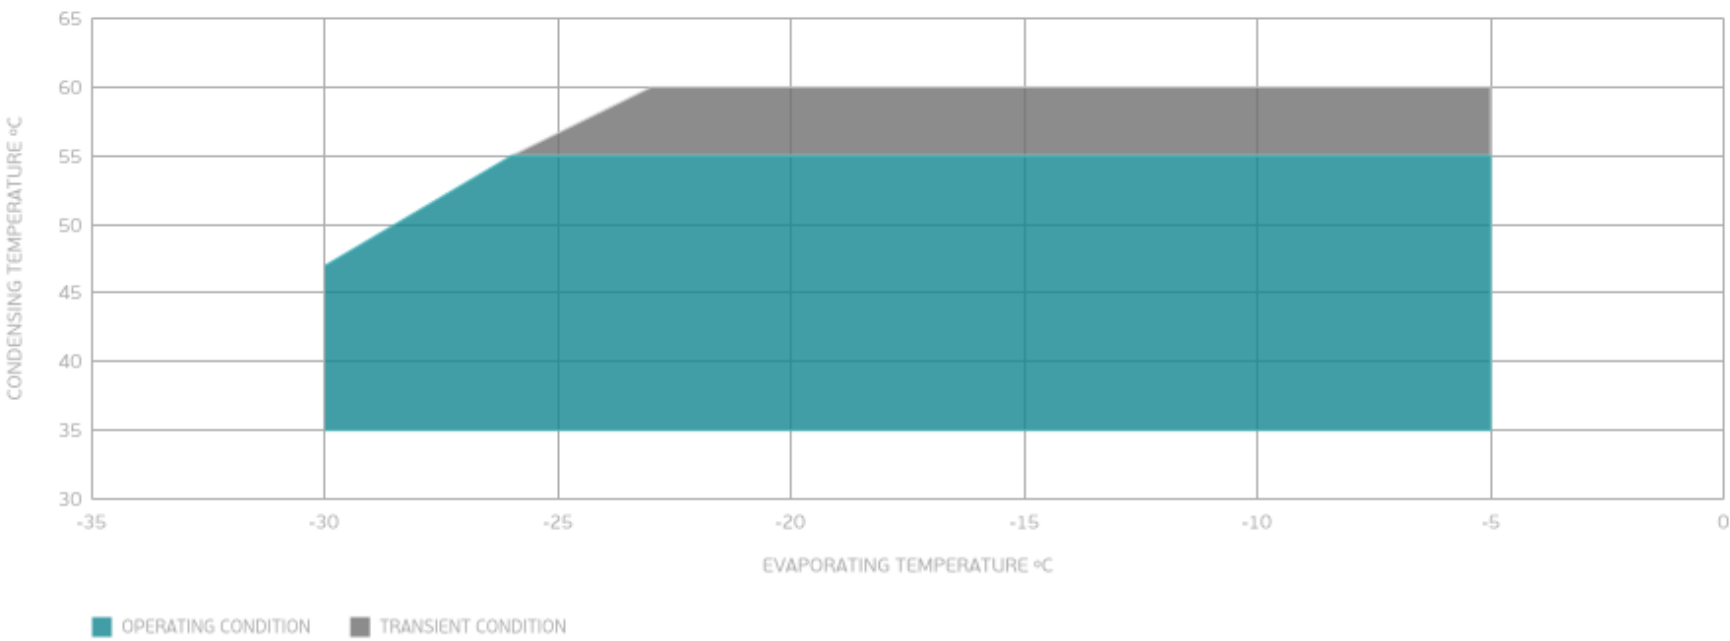

External


EXTERNAL CHARACTERISTICS

Base Plate	SMALL
Tray Holder	NO


Connector	Internal Diameter	Shape	Material
Suction	8.1 mm	SLANTED 42°	COPPER
Discharge	6.1 mm	STRAIGHT	COPPER
Process	6.1 mm	SLANTED 42°	COPPER

EXTERNAL DIMENSIONS

SHELL

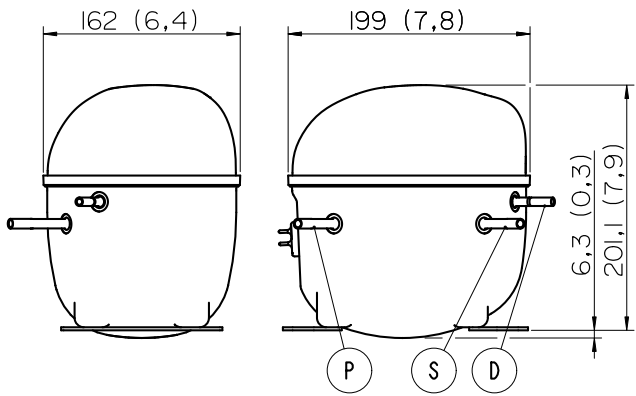

BASE

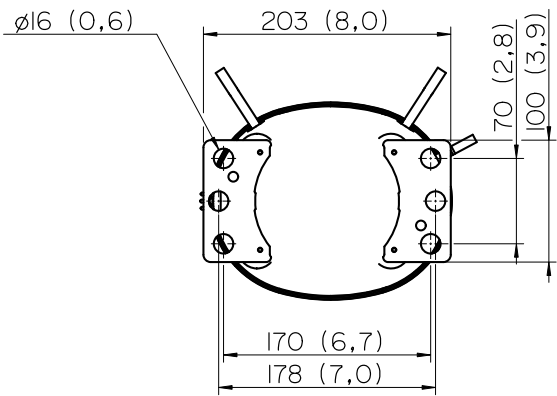

FENCE

