


NEK2150GK



ENGINEERING CODE
959AA58



REFRIGERANT
R-404A



POWER SUPPLY
220-240 V 50 Hz



APPLICATION
LBP



MOTOR TYPE
CSIR



STANDARD
EN12900



COOLING CAPACITY
337 W



EFFICIENCY
0.96 W/W

DATA

GENERAL DATA

Model	NEK2150GK
Type	Hermetic Reciprocating
Technology	ON/OFF
Compressor Application	LBP
Expansion Device	Capillary Tube or Expansion Valve
Compressor Cooling	Fan/220
HP	1/2
Starting Torque	HST
Plant	SLOVAKIA

ELECTRICAL DATA

Start Winding Resistance	27.95 Ω at 25°C
Run Winding Resistance	5.11 Ω at 25°C

MECHANICAL DATA

Displacement	12.11 cm ³
Oil Charge	350 ml
Oil Type	ESTER
Oil Viscosity	ISO22
Weight	11 Kg

ELECTRICAL COMPONENTS

Start Capacitor	72-88 µf/330 V
CSR CSIR BOX	No
Starting Device Type	RELAY
Starting Device Description	MTRP-0012*
Overload Protection	T0634/G6

PERFORMANCE

TESTED CONDITIONS

Tested Refrigerant	R-404A
Tested Application	LBP
Tested Standard	EN12900
Tested Cooling	Fan
Tested Voltage	220 V
Refrigerant Temperature	Dew

RATED POINTS

Condensing Temperature °C	Evaporating Temperature °C	Cooling Capacity W	Efficiency W/W	Power Consumption W	Current A	Gas Flow Rate kg/h
40	-35	337	0.96	352	-	9.14

Test Condition: Subcooling 0 K, Return Gas 20 °C. Data are an indication of performance based simulation.

PERFORMANCE CURVE

Condensing Temperature 35°C

Evaporating Temperature °C	Cooling Capacity W	Efficiency W/W	Power Consumption W	Current A	Gas Flow Rate kg/h
-40	282	0.93	302	-	7.16
-35	370	1.07	345	-	9.44
-30	478	1.22	391	-	12.26
-25	609	1.39	438	-	15.67
-20	762	1.58	484	-	19.75
-15	939	1.78	527	-	24.54
-10	1142	2.02	566	-	30.11

Test Condition: Subcooling 0 K, Return Gas 20 °C. Data are an indication of performance based simulation.

PERFORMANCE CURVE


Condensing Temperature 45°C

Evaporating Temperature °C	Cooling Capacity W	Efficiency W/W	Power Consumption W	Current A	Gas Flow Rate kg/h
-40	228	0.74	310	-	6.56
-35	303	0.85	357	-	8.78
-30	396	0.97	410	-	11.52
-25	507	1.09	466	-	14.82
-20	637	1.21	525	-	18.76
-15	787	1.35	584	-	23.39
-10	958	1.49	642	-	28.76
Test Condition: Subcooling 0 K, Return Gas 20 °C. Data are an indication of performance based simulation.					

PERFORMANCE CURVE

Condensing Temperature 55°C

Evaporating Temperature °C	Cooling Capacity W	Efficiency W/W	Power Consumption W	Current A	Gas Flow Rate kg/h
-30	308	0.74	417	-	10.49
-25	398	0.83	482	-	13.70
-20	505	0.92	551	-	17.50
-15	627	1.01	624	-	21.97
-10	767	1.10	698	-	27.16
Test Condition: Subcooling 0 K, Return Gas 20 °C. Data are an indication of performance based simulation.					

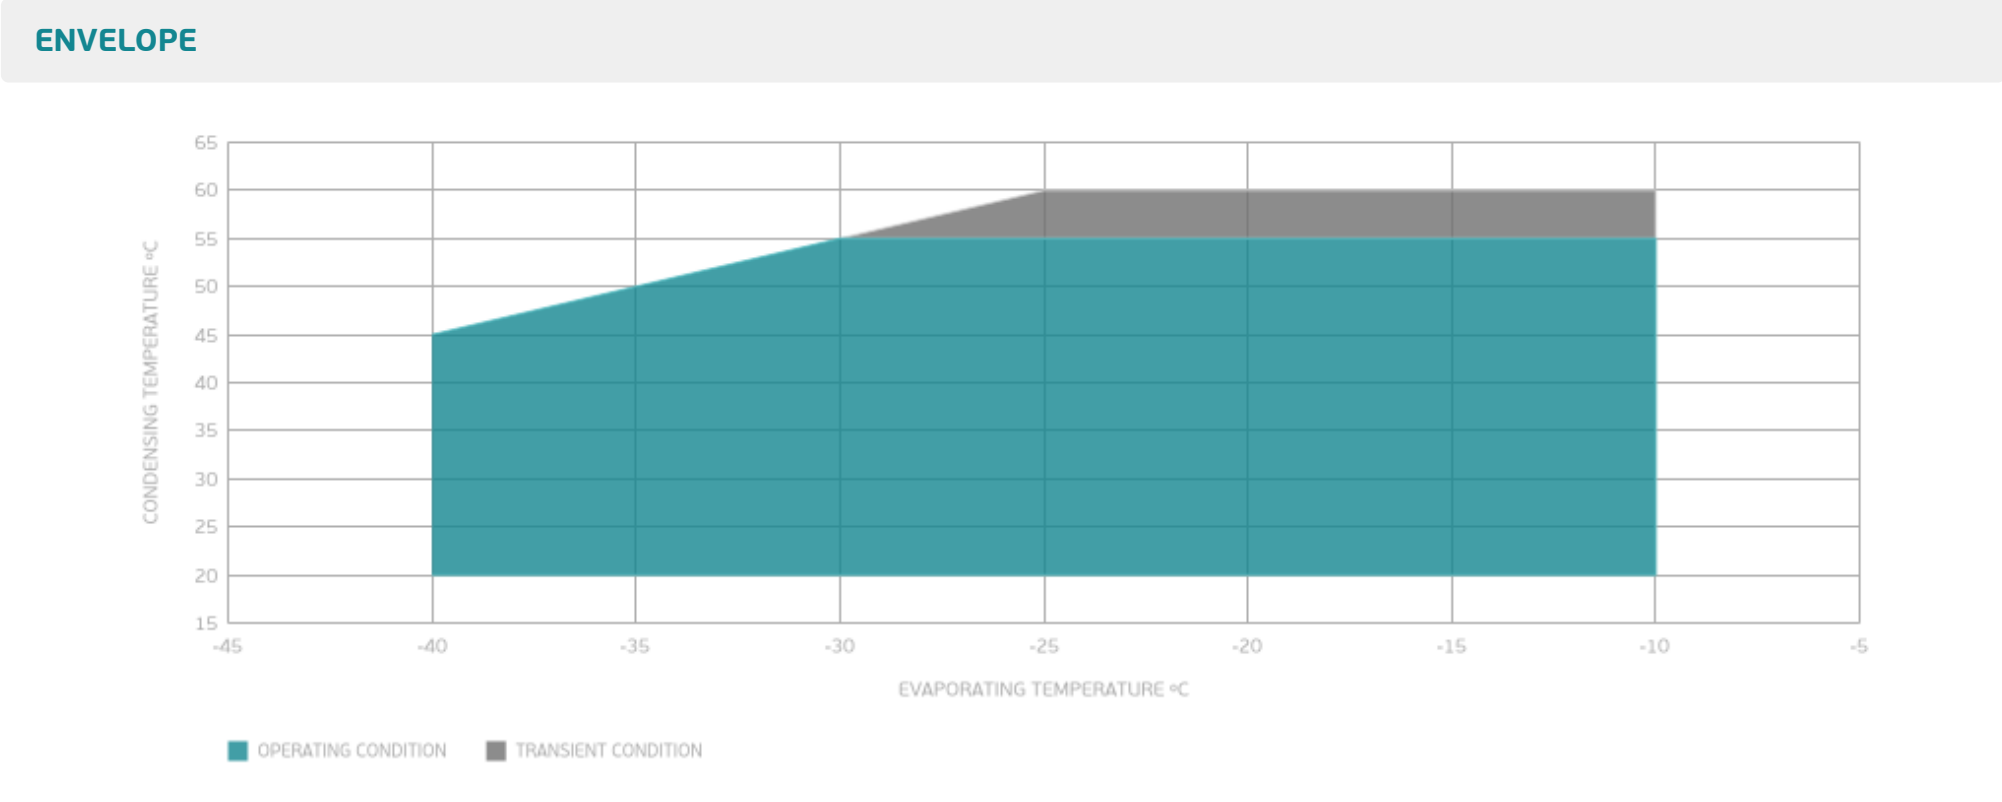

External


EXTERNAL CHARACTERISTICS

Base Plate	SMALL
Tray Holder	YES


Connector	Internal Diameter	Shape	Material
Suction	8.1 mm	SLANTED 42°	COPPER
Discharge	6.1 mm	STRAIGHT	COPPER

EXTERNAL DIMENSIONS

SHELL

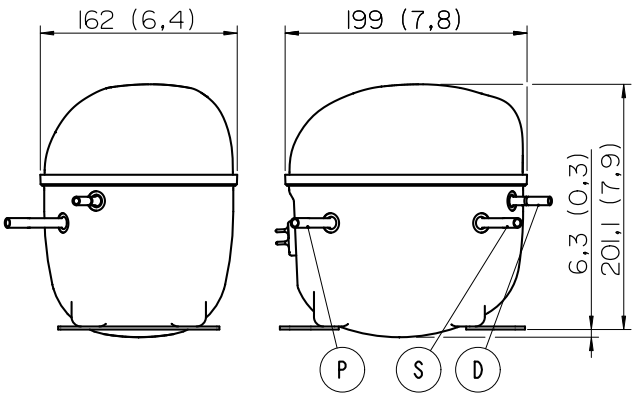

BASE

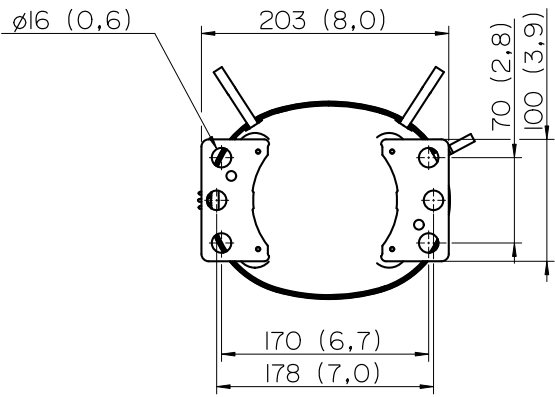

FENCE

