


NEK6217U



ENGINEERING CODE
863GA51



REFRIGERANT
R-290



POWER SUPPLY
220-240 V 50 Hz



APPLICATION
MBP



MOTOR TYPE
CSCR



STANDARD
EN12900



COOLING CAPACITY
1041 W



EFFICIENCY
1.92 W/W



DATA

GENERAL DATA

Model	NEK6217U
Type	Hermetic Reciprocating
Technology	ON/OFF
Compressor Application	MBP
Expansion Device	Capillary Tube or Expansion Valve
Compressor Cooling	Fan/220
HP	1/2+
Starting Torque	HST
Plant	SLOVAKIA

ELECTRICAL DATA

Start Winding Resistance	13.9 Ω at 25°C
Run Winding Resistance	3.1 Ω at 25°C
Locked Rotor Amperage (LRA) 50Hz	24 A

MECHANICAL DATA

Displacement	14.28 cm³
Oil Charge	350 ml
Oil Type	AB
Oil Viscosity	ISO32
Weight	11.6 Kg

ELECTRICAL COMPONENTS

Start Capacitor	53-64 μf/330 V
Run Capacitor	10.0 μf/440 V
CSR CSIR BOX	Yes
Starting Device Description	RVA4M3C-576
Overload Protection	T0918/G9

PERFORMANCE

TESTED CONDITIONS

Tested Refrigerant	R-290
Tested Application	MBP
Tested Standard	EN12900
Tested Cooling	Fan
Tested Voltage	220 V
Refrigerant Temperature	Dew

RATED POINTS

Condensing Temperature °C	Evaporating Temperature °C	Cooling Capacity W	Efficiency W/W	Power Consumption W	Current A	Gas Flow Rate kg/h
45	-10	1041	1.92	543	-	12.81

Test Condition: Subcooling 0 K, Return Gas 20 °C. Data are an indication of performance based simulation.

PERFORMANCE CURVE

Condensing Temperature 35°C

Evaporating Temperature °C	Cooling Capacity W	Efficiency W/W	Power Consumption W	Current A	Gas Flow Rate kg/h
-20	800	1.88	425	-	8.87
-15	981	2.15	457	-	10.94
-10	1194	2.42	494	-	13.37
-5	1440	2.72	529	-	16.22
0	1722	3.09	557	-	19.54
5	2043	3.56	574	-	23.39
10	2404	4.19	574	-	27.82

Test Condition: Subcooling 0 K, Return Gas 20 °C. Data are an indication of performance based simulation.

PERFORMANCE CURVE


Condensing Temperature 45°C

Evaporating Temperature °C	Cooling Capacity W	Efficiency W/W	Power Consumption W	Current A	Gas Flow Rate kg/h
-20	693	1.48	468	-	8.43
-15	853	1.70	501	-	10.44
-10	1041	1.92	543	-	12.81
-5	1259	2.14	589	-	15.59
0	1509	2.38	633	-	18.85
5	1794	2.67	671	-	22.63
10	2115	3.03	697	-	26.98
Test Condition: Subcooling 0 K, Return Gas 20 °C. Data are an indication of performance based simulation.					

PERFORMANCE CURVE

Condensing Temperature 55°C

Evaporating Temperature °C	Cooling Capacity W	Efficiency W/W	Power Consumption W	Current A	Gas Flow Rate kg/h
-10	886	1.57	565	-	12.16
-5	1074	1.74	616	-	14.87
0	1291	1.92	671	-	18.04
5	1539	2.13	724	-	21.74
10	1820	2.36	770	-	26.01
Test Condition: Subcooling 0 K, Return Gas 20 °C. Data are an indication of performance based simulation.					

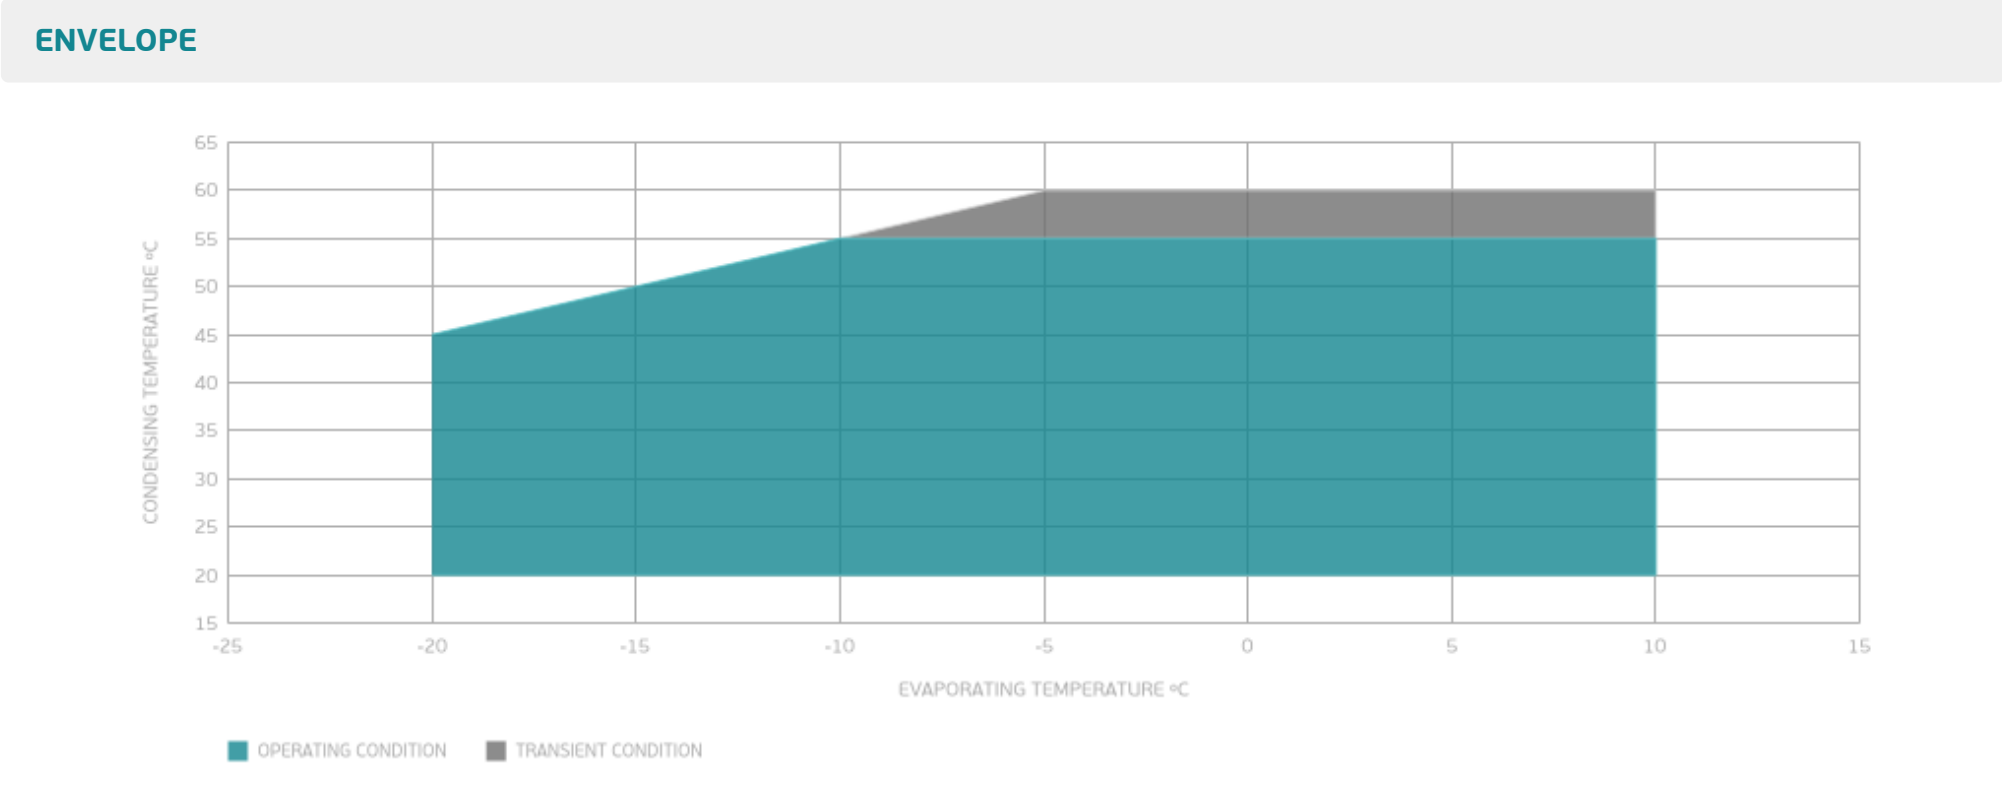

External


EXTERNAL CHARACTERISTICS

Base Plate	SMALL
Tray Holder	NO


Connector	Internal Diameter	Shape	Material
Suction	8.1 mm	SLANTED 42°	COPPER
Discharge	6.1 mm	STRAIGHT	COPPER

EXTERNAL DIMENSIONS

SHELL

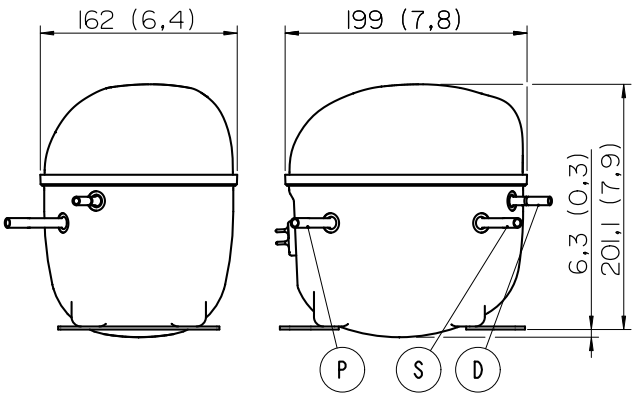

BASE

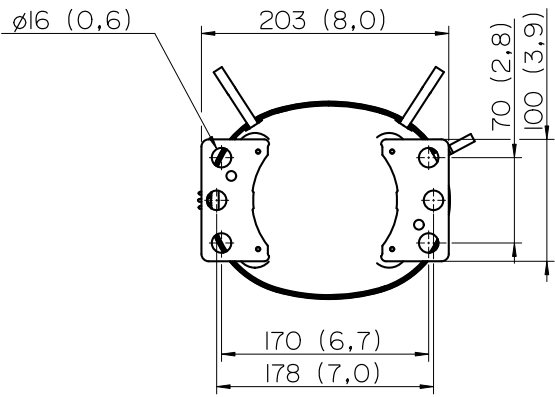

FENCE

