


NT6220GK



ENGINEERING CODE
922BN09



REFRIGERANT
R-404A



POWER SUPPLY
200-240 V 50
Hz/230 V 60 Hz



APPLICATION
MBP



MOTOR TYPE
CSCR



STANDARD
EN12900



COOLING CAPACITY
1101 W



EFFICIENCY
1.74 W/W

DATA

GENERAL DATA

Model	NT6220GK
Type	Hermetic Reciprocating
Technology	ON/OFF
Compressor Application	MBP
Expansion Device	Capillary Tube or Expansion Valve
Compressor Cooling	Fan/200
HP	3/4
Starting Torque	HST
Plant	SLOVAKIA

ELECTRICAL DATA

Start Winding Resistance	12.16 Ω at 25°C
Run Winding Resistance	1.86 Ω at 25°C

MECHANICAL DATA

Displacement	14.5 cm³
Oil Charge	450 ml
Oil Type	ESTER
Oil Viscosity	ISO22
Weight	17 Kg

ELECTRICAL COMPONENTS

Start Capacitor	88-108 μf/330 V
Run Capacitor	17.5 μf/440 V
CSR CSIR BOX	Yes
Starting Device Description	RVA4AL3C-649
Overload Protection	MRA38112-3261

PERFORMANCE

TESTED CONDITIONS

Tested Refrigerant	R-404A
Tested Application	MBP
Tested Standard	EN12900
Tested Cooling	Fan
Tested Voltage	200 V
Max Refrigerant Charge	800 g
Refrigerant Temperature	Dew

RATED POINTS

Condensing Temperature °C	Evaporating Temperature °C	Cooling Capacity W	Efficiency W/W	Power Consumption W	Current A	Gas Flow Rate kg/h
45	-10	1101	1.74	634	-	33.07

Test Condition: Subcooling 0 K, Return Gas 20 °C. Data generated in accordance to EN 12900:2013 polynomial equation and tolerance guidelines.

PERFORMANCE CURVE

Condensing Temperature 35°C

Evaporating Temperature °C	Cooling Capacity W	Efficiency W/W	Power Consumption W	Current A	Gas Flow Rate kg/h
-20	849	1.70	500	-	22.02
-15	1086	1.97	552	-	28.37
-10	1362	2.30	593	-	35.90

Test Condition: Subcooling 0 K, Return Gas 20 °C. Data generated in accordance to EN 12900:2013 polynomial equation and tolerance guidelines.

PERFORMANCE CURVE

Condensing Temperature 45°C

Evaporating Temperature °C	Cooling Capacity W	Efficiency W/W	Power Consumption W	Current A	Gas Flow Rate kg/h
-20	678	1.32	515	-	19.98
-15	870	1.51	575	-	25.87
-10	1101	1.74	634	-	33.07

Test Condition: Subcooling 0 K, Return Gas 20 °C. Data generated in accordance to EN 12900:2013 polynomial equation and tolerance guidelines.


PERFORMANCE CURVE

Condensing Temperature 55°C

Evaporating Temperature °C	Cooling Capacity W	Efficiency W/W	Power Consumption W	Current A	Gas Flow Rate kg/h
-10	859	1.31	658	-	30.46

Test Condition: Subcooling 0 K, Return Gas 20 °C. Data generated in accordance to EN 12900:2013 polynomial equation and tolerance guidelines.

ENVELOPE

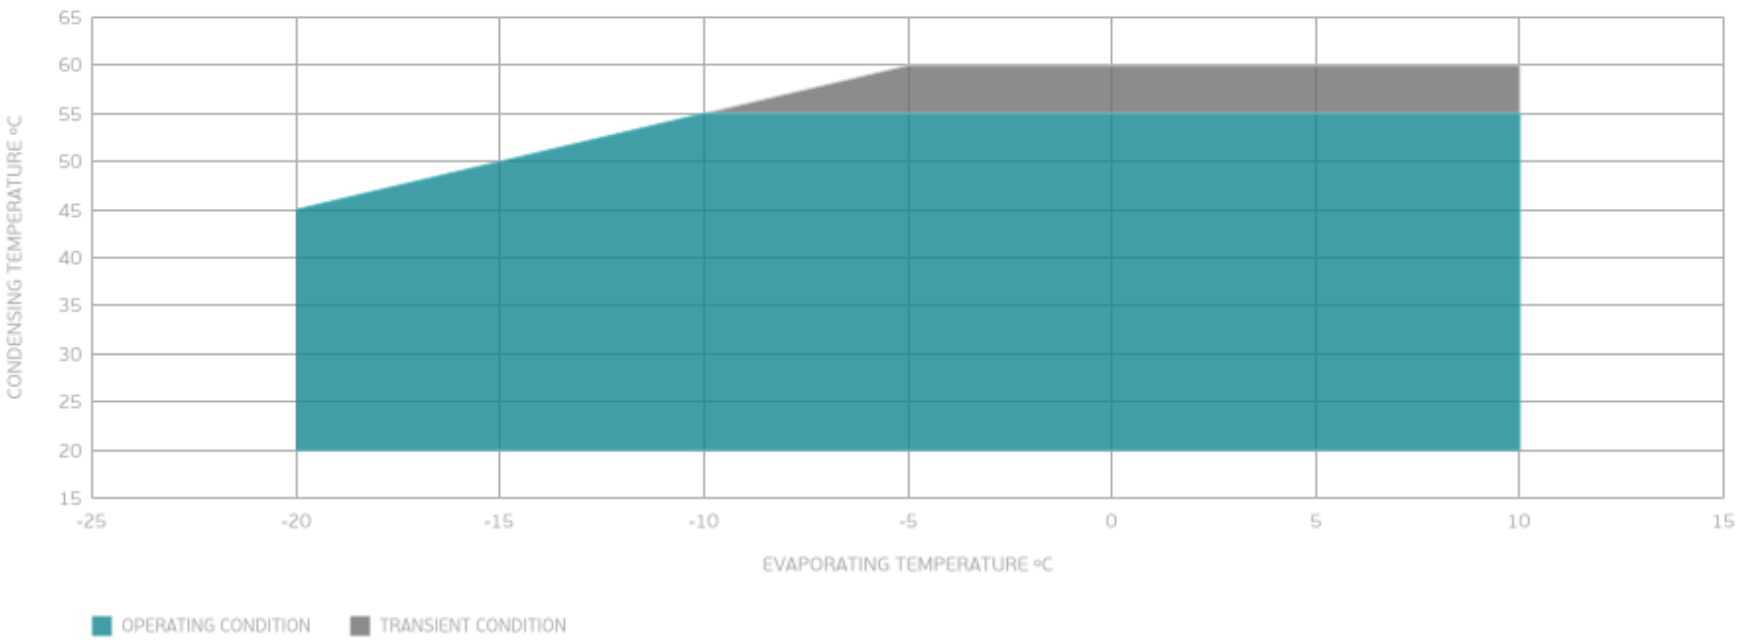

External

EXTERNAL CHARACTERISTICS

Base Plate	UNI
Tray Holder	NO

Connector	Internal Diameter	Shape	Material
Suction	12.7 mm	ROTOLOCK(EX. THR. 1"-14UNS-2A)	STEEL
Discharge	6.42 mm	VERTICAL	COPPER
Process	6.42 mm	VERTICAL	COPPER

EXTERNAL DIMENSIONS

