


DAIRY CASE PUMP

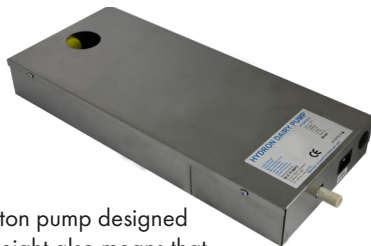

DATA SHEET

The HY/DP30-S is a low profile, yet powerful, piston pump designed for use with dairy case installations. It's ultra low height also means that it can be used for dairy cases where height is a restriction. It has been designed for when low gravity drain is not available.

230V

37W

3 YEAR
GUARANTEE



Slim 60mm High Profile

**MADE IN
BRITAIN**

Intelligent Overload Protection




High level alarm contacts



PHOENIX
CONDENSATE PUMPS

Dimensions

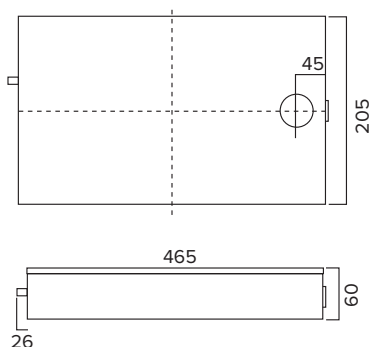

Specification

Input Voltage:	230V 50Hz +/- 10%
Pumping Head:	30 metres
Max Flow Rate:	110ltr/hr
Tank Capacity:	5ltr
Ambient Temperature:	0-50°C
Power Consumption:	37W

Version 1. 11/2019

HYDRON

HYDRON PUMPS
Unit 3, Drake Business Park
Drake House Crescent, Sheffield, S20 7HT

T: 01246 432325
F: 01246 432324
E: sales@hydronpumps.co.uk

Additional Information

- Inlet connection: 12.7mm OD
- Outlet connection: 15mm ID
- Built-in check valve

Flow Rates

HORIZONTAL RUN	PERFORMANCE					
	1m	10m	15m	20m	25m	30m
HY/DP30-S						
1m	110ltr/hr	60ltr/hr	50ltr/hr	45ltr/hr	40ltr/hr	25ltr/hr

Code	Pumping Head	Dimensions (L x W x D mm)
HY/DP30-S	30 metres	465 x 205 x 60