


NT6222GK



ENGINEERING CODE
922CN04



REFRIGERANT
R-404A



POWER SUPPLY
200-240 V 50
Hz/230 V 60 Hz



APPLICATION
MBP



MOTOR TYPE
CSIR



STANDARD
EN12900



COOLING CAPACITY
1623 W



EFFICIENCY
1.68 W/W

DATA

GENERAL DATA

Model	NT6222GK
Type	Hermetic Reciprocating
Technology	ON/OFF
Compressor Application	MBP
Expansion Device	Capillary Tube or Expansion Valve
Compressor Cooling	Fan/230
HP	1
Starting Torque	HST
Plant	SLOVAKIA

ELECTRICAL DATA

Start Winding Resistance	10.1 Ω at 25°C
Run Winding Resistance	1.75 Ω at 25°C

MECHANICAL DATA

Displacement	17.39 cm³
Oil Charge	450 ml
Oil Type	ESTER
Oil Viscosity	ISO22
Weight	17 Kg

ELECTRICAL COMPONENTS

Start Capacitor	130-156 µf/250 V
CSR CSIR BOX	No
Starting Device Type	RELAY
Starting Device Description	MTRPH-60-59*
Overload Protection	T0750/G6

PERFORMANCE

TESTED CONDITIONS

Tested Refrigerant	R-404A
Tested Application	MBP
Tested Standard	EN12900
Tested Cooling	Fan
Tested Voltage	230 V
Max Refrigerant Charge	800 g
Refrigerant Temperature	Dew

RATED POINTS

Condensing Temperature °C	Evaporating Temperature °C	Cooling Capacity W	Efficiency W/W	Power Consumption W	Current A	Gas Flow Rate kg/h
45	-10	1623	1.68	966	-	48.72


Test Condition: Subcooling 0 K, Return Gas 20 °C. Data are an indication of performance based simulation.

PERFORMANCE CURVE				Condensing Temperature 35°C	
Evaporating Temperature °C	Cooling Capacity W	Efficiency W/W	Power Consumption W	Current A	Gas Flow Rate kg/h
-20	1294	1.77	732	-	33.53
-15	1596	2.00	797	-	41.74
-10	1954	2.24	872	-	51.52
-5	2372	2.50	948	-	63.14
0	2851	2.80	1017	-	76.86
5	3394	3.17	1070	-	92.95
10	4004	3.64	1099	-	111.67
Test Condition: Subcooling 0 K, Return Gas 20 °C. Data are an indication of performance based simulation.					

PERFORMANCE CURVE				Condensing Temperature 45°C	
Evaporating Temperature °C	Cooling Capacity W	Efficiency W/W	Power Consumption W	Current A	Gas Flow Rate kg/h
-20	1070	1.32	809	-	31.54
-15	1323	1.51	878	-	39.35
-10	1623	1.68	966	-	48.72
-5	1972	1.85	1063	-	59.92
0	2374	2.04	1163	-	73.20
5	2830	2.25	1256	-	88.83
10	3343	2.51	1333	-	107.08
Test Condition: Subcooling 0 K, Return Gas 20 °C. Data are an indication of performance based simulation.					

PERFORMANCE CURVE				Condensing Temperature 55°C	
Evaporating Temperature °C	Cooling Capacity W	Efficiency W/W	Power Consumption W	Current A	Gas Flow Rate kg/h
-10	1283	1.28	1001	-	45.47
-5	1561	1.41	1110	-	56.13
0	1882	1.53	1229	-	68.87
5	2247	1.66	1351	-	83.95
10	2660	1.81	1466	-	101.62
Test Condition: Subcooling 0 K, Return Gas 20 °C. Data are an indication of performance based simulation.					

ENVELOPE

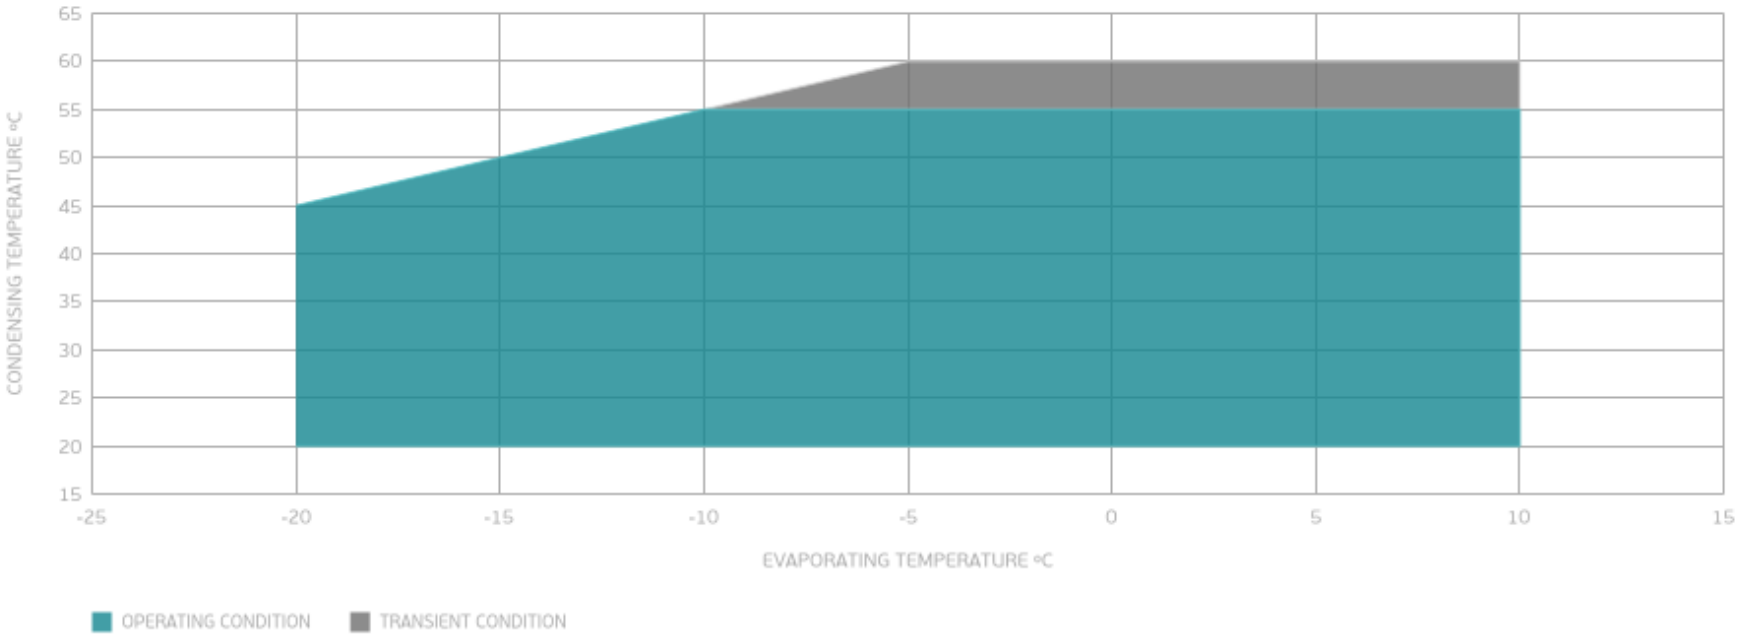

External

EXTERNAL CHARACTERISTICS

Base Plate	UNI
Tray Holder	NO

Connector	Internal Diameter	Shape	Material
Suction	9.6 mm	VERTICAL	COPPER
Discharge	6.42 mm	VERTICAL	COPPER
Process	6.42 mm	VERTICAL	COPPER

EXTERNAL DIMENSIONS

